


April // 2018

Timber Effects Range



Non Combustible

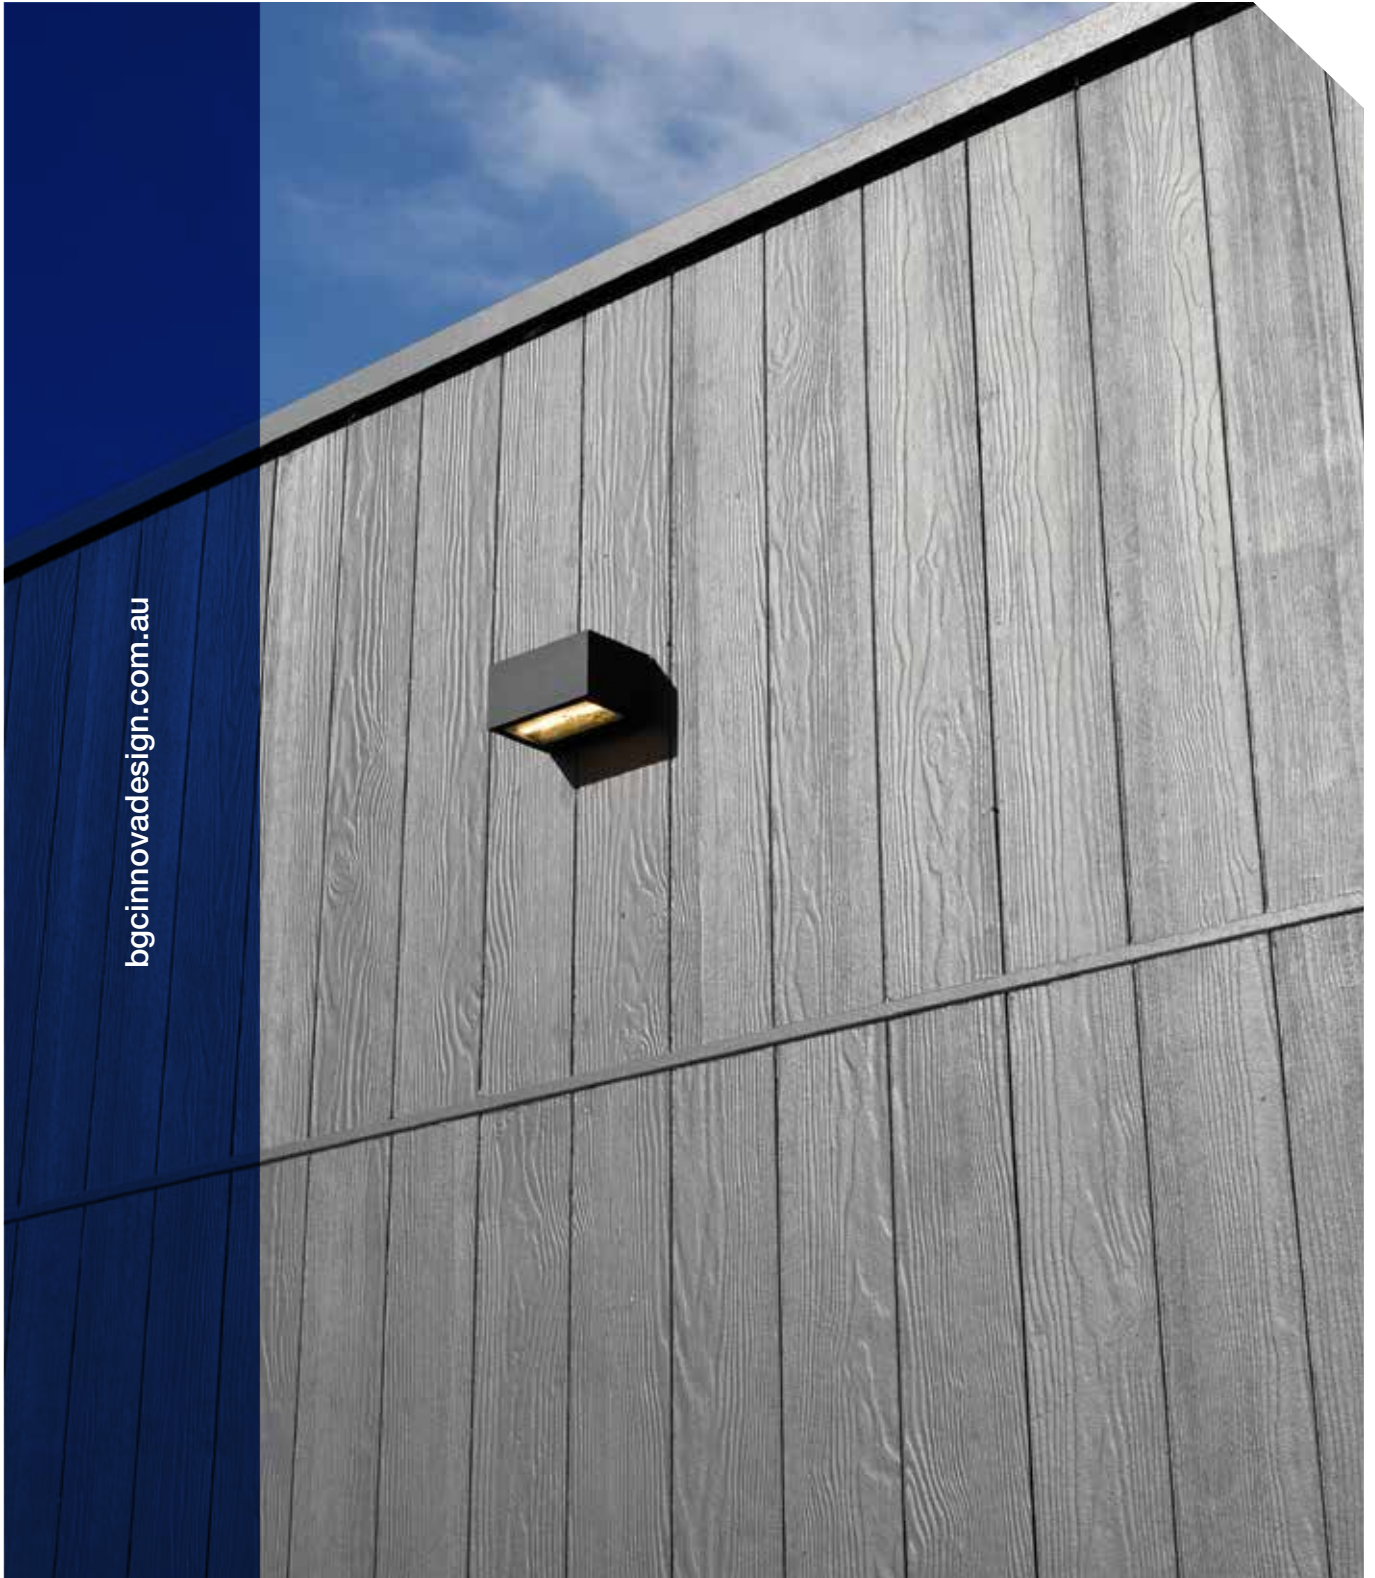

bgcinnovatedesign.com.au



Fibre Cement



The new range of Innova™
Timber Effects cladding products
gives you the natural flair and warm
colours of timber cladding with all
the fire resistance and longevity
benefits of fibre cement.

The timber grain is embossed into the fibre cement
and this is enhanced when the boards are stained
or painted – now it is possible to have the benefits
of fibre cement AND the look of timber

Two products, Duragroove™ panels and Stratum™
Weatherboards are offered with the timber effect.

Finish Timber Effects wall with timber stain or
exterior paint on Innova™ cladding that:

- // won't rot
- // won't twist
- // is easy and fast to install
- // is non combustible
- // is low maintenance

Timber Effects Range



Installation

For correct installation of the products in the Timber Effects Range please refer to either the Stratum™ or Duragroove™ brochures available at bgcinnovadesign.com.au



BGC's products have superior fire performance against four key indicies.



Ignition index = 0
Fibre cement does not ignite



Spread of flame index = 0
There is no spread of fire with fibre cement



Heat evolved index = 0
Heat does not evolve from fibre cement



Smoke developed index = 0-1
Smoke is not emitted from fibre cement



Up to **BAL 40**
as per AS3959:2009

Painting/Staining

Products within the Timber Effects Range are supplied as factory sealed fibre cement weatherboards/sheets and can be finished in a variety of finishes including paint and stains.

To enhance both the appearance and performance of our Timber Effects Range products, ensure that the Timber Effects products are clean and dry prior to application of a quality exterior paint or stain. BGC recommend that at least two coats of water based exterior grade paint or stain be applied. Oil based paints and stains are NOT suitable for use on fibre cement products.

The application of semi-transparent stains may vary in uniformity and it is recommended that a sample piece is stained to achieve the required effect prior to applying the stain to the installed walls. Using a paint pad will enhance the timber grain effect.

It is recommended that the Timber Effects Range products are painted according to the paint manufacturer's instructions within three months following delivery to site. Should the Timber Effects Range products be exposed to the elements for a period beyond the initial three months to achieve an optimum finish an additional priming coat is recommended prior to the top finishing coats being applied.



Stratum™ is a vibrant and innovative alternative to traditional weatherboards and now with a timber texture you have the best of both worlds – the longevity of Fibre Cement and the character of timber. The deep shadow line creates a contemporary aesthetic with two groove options to choose from.



Spotted Gum / Exterior water based varnish stain

Stratum™ Woodgrain



A 300mm wide plank



Cedar / Exterior water based varnish stain

Stratum™ Duo Woodgrain



A 300mm wide plank with a 16mm groove in the centre giving the appearance of 2 thinner planks



Windspray / Acrylic water based paint

THICKNESS (mm)	FINISH	WEIGHT kg/lm	WIDTH (mm)	LENGTH (mm)	
				2700	4200
12	Stratum™ Woodgrain	5.2	300	✓	✓
	Stratum™ Duo Woodgrain			✓	✓

bgcinnovadesign.com.au/stratum

Some sizes may not be available in all states, please check with your local BGC office for availability. Stratum™ is supplied as factory sealed fibre cement weatherboards ready for finishing on site with stain or paint.



Duragroove™ Wide and Extra Wide Profiles add flexibility to the design of any facade. The shiplap joint makes it easier and faster to install and our offer of 3 sheet sizes helps reduce costly wastage.




Merbu / Exterior water based varnish stain

Duragroove™ Wide Woodgrain



Charcoal / Exterior water based varnish stain

Duragroove™ Extra Wide Woodgrain

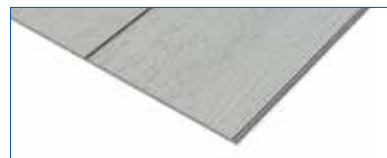

Woodland Grey / Acrylic water based paint

A vertically grooved panel with 150mm between the grooves

A vertically grooved panel with 400mm between the grooves

THICKNESS (mm)	FINISH	WEIGHT kg/m ²	WIDTH (mm)	LENGTH (mm)		
				2450	2750	3000
9	Duragroove™ Wide Woodgrain	13.5	1200	✓	✓	✓
	Duragroove™ Extra Wide Woodgrain			✓	✓	✓

bgcinnovadesign.com.au/duragroove

Some sizes may not be available in all states, please check with your local BGC office for availability. Duragroove™ is supplied as factory sealed fibre cement panels ready for finishing on site with stain or paint.

To contact
your nearest
BGC stockist,
Please call:

ADELAIDE

71 FROST ROAD
SALISBURY SOUTH
SOUTH AUSTRALIA 5106
TELEPHONE 08 8250 4962
FACSIMILE 08 8258 2612

BRISBANE

53 ARGON STREET
CAROLE PARK
QUEENSLAND 4300
TELEPHONE 07 3271 1711
FACSIMILE 07 3271 1733

MELBOURNE

200 MAIDSTONE STREET
ALTONA VICTORIA 3018
TELEPHONE 03 9392 9444
FACSIMILE 03 9392 9404

PERTH

121 BANNISTER ROAD
CANNING VALE
WESTERN AUSTRALIA 6155
TELEPHONE 08 9334 4900
FACSIMILE 08 9334 4749

SYDNEY

233 MILPERRA ROAD
BANKSTOWN
NEW SOUTH WALES 2200
TELEPHONE 02 9709 0600
FACSIMILE 02 9771 9870

TECHNICAL HELP LINE

1300 652 242

BGCINNOVADESIGN.COM.AU

Exterior products and applications

INNOVA™ RANGE OF PRODUCTS

DURACOM™ / A compressed fibre cement facade system.

DURAFLOOR™ / Is the ultimate flooring product that can be used in both interior and exterior applications.

DURAGRID™ RESIDENTIAL & DURAGRID™ LIGHT COMMERCIAL / A lightweight facade giving a modern and durable finish.

DURAGROOVE™ / A vertically grooved exterior facade panel.

DURASCAPE™ / A lightweight exterior facade base sheet with a subtle vertical shadow line.

NULINE™ PLUS / A weatherboard style cladding system.

STONESHEET™ / Purpose designed substrate for stone tile facade.

STRATUM™ / Is a range of plank products, each of which can be used as stand-alone products or used together to create a striking exterior cladding solution.

STRATUM™ ERA / A traditional, yet contemporary weatherboard.

Exterior products and applications

BGC FIBRE CEMENT RANGE OF PRODUCTS

DURASHEET™ / Ideal for the cladding of gables and lining of eaves. Can also be used on commercial soffits and cladding on non-impact areas.

DURAPLANK™ / Available in Smooth, Woodgrain and Rusticated finishes, Duraplank™ is ideal for exterior cladding of upper storey conversions or ground level extensions.

DURATEX™ / A base sheet used for textured coatings on exterior wall applications.

DURALINER™ PLUS / An exterior lining board that is the perfect substrate for tiles and is ideal for wet areas.

DURALATTICE™ / Square or diamond patterned lattice, suitable for screens, pergolas and fences.

COMPRESSED / Used for domestic, commercial sheet for wet areas, flooring, partitions, exterior decking, fascia and facade cladding.

DURALUX™ PLUS / Suitable for exterior applications where it will be sheltered from direct weather.

Interior products and applications

BGC FIBRE CEMENT RANGE OF PRODUCTS

DURALUX™ PLUS / An interior lining board suitable for ceilings and soffits.

DURALINER™ PLUS / An interior lining board, this is the perfect substrate for tiles and is ideal for wet areas.

CERAMIC TILE UNDERLAY / A substrate for ceramic and slate floor tiles.

VINYL CORK FLOOR COVERINGS / A substrate for vinyl floors.

