


TIMBER FRAME / HAND NAILING  
 Use 50mm minimum class 3 fibre cement nails.


TIMBER FRAME / GUN NAILING  
 Use a minimum class 3 50mm long coil nail or 50mm Deckfast type D head 2.5mm face head.


STEEL FRAME / SCREW FIXING  
 Use minimum class 3 32mm screws. Buildex: Fibre Zip or Wingtek. (refer pg8).

N1-N2 Concealed fastener  
 All other wind zones a concealed fastener and facefastener 50mm from the bottom of the overlapping board.



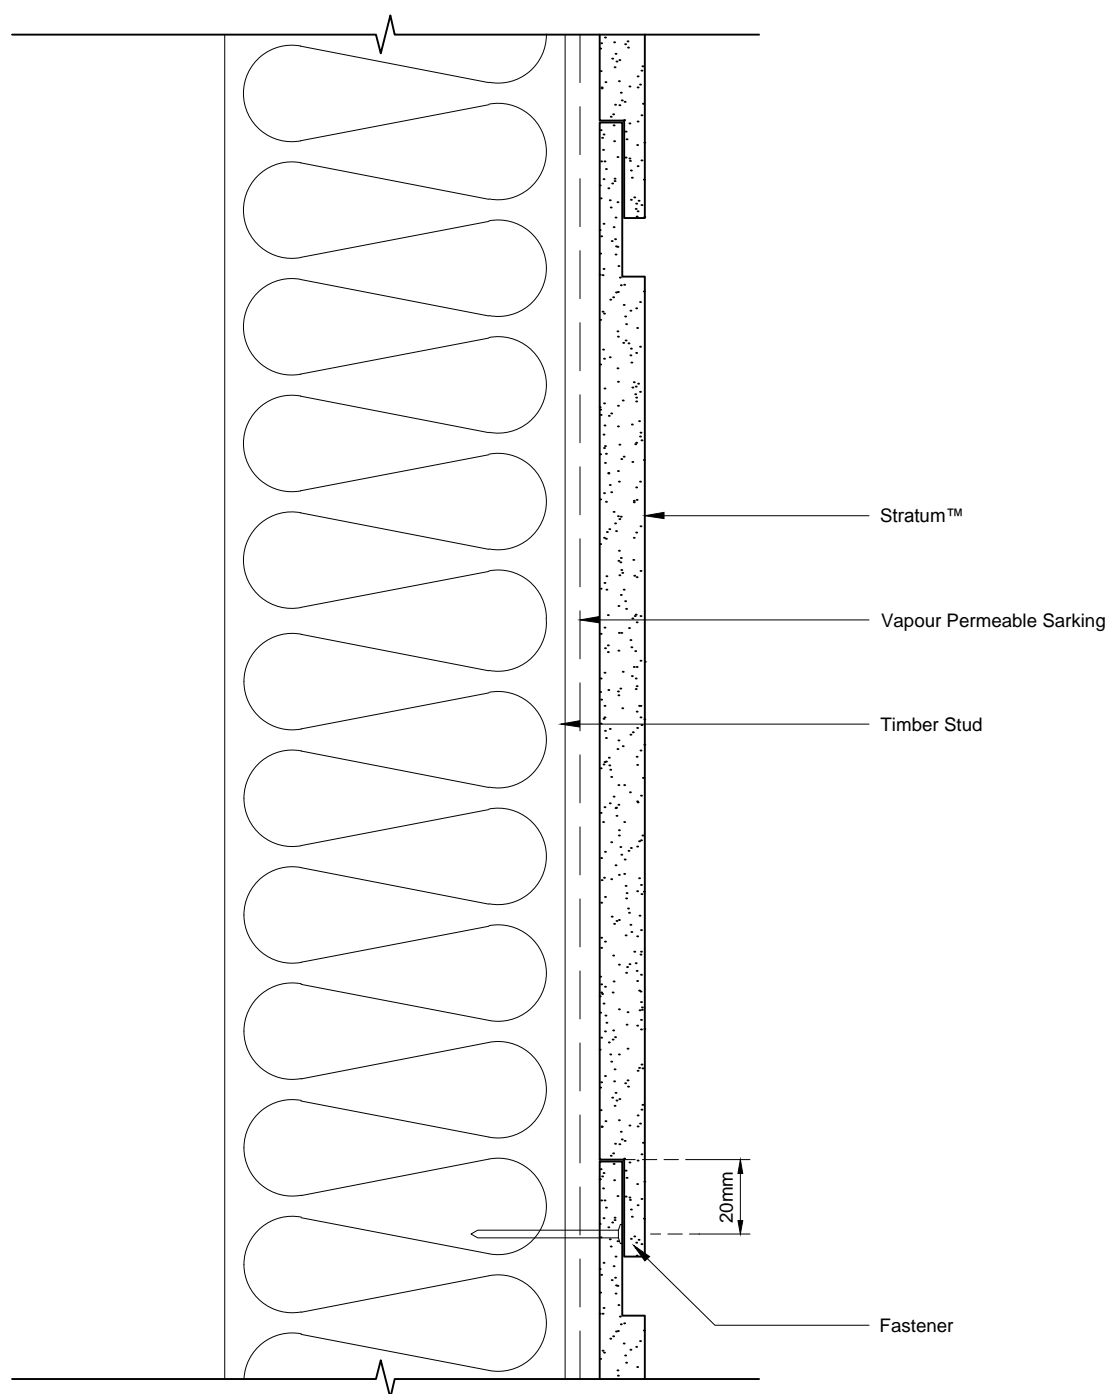

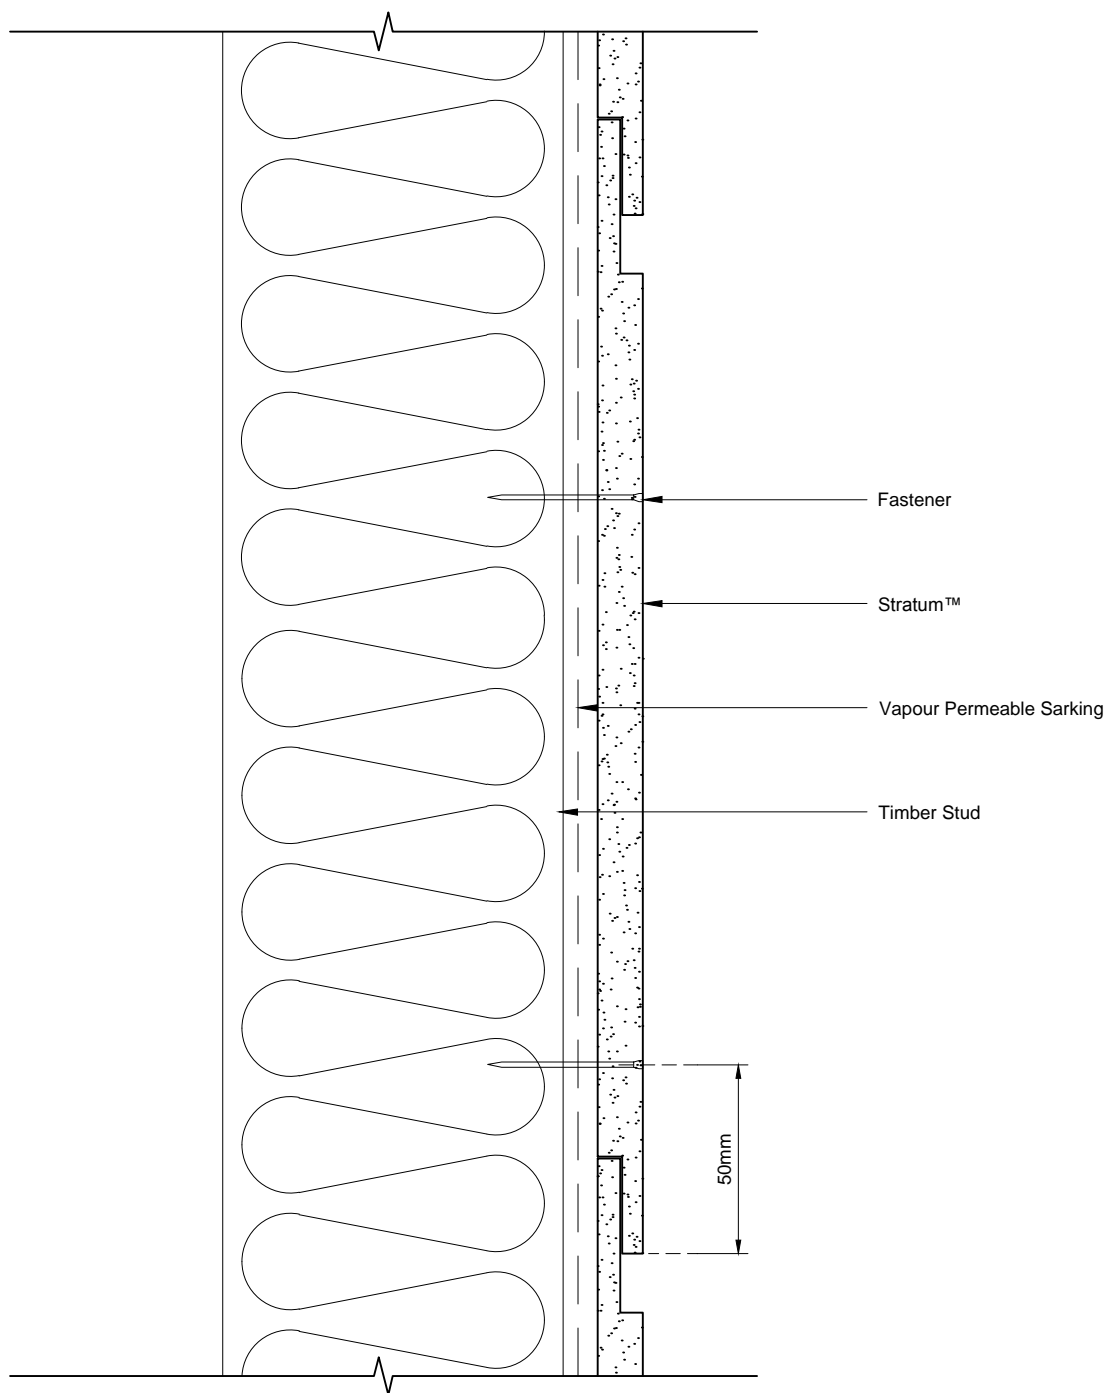

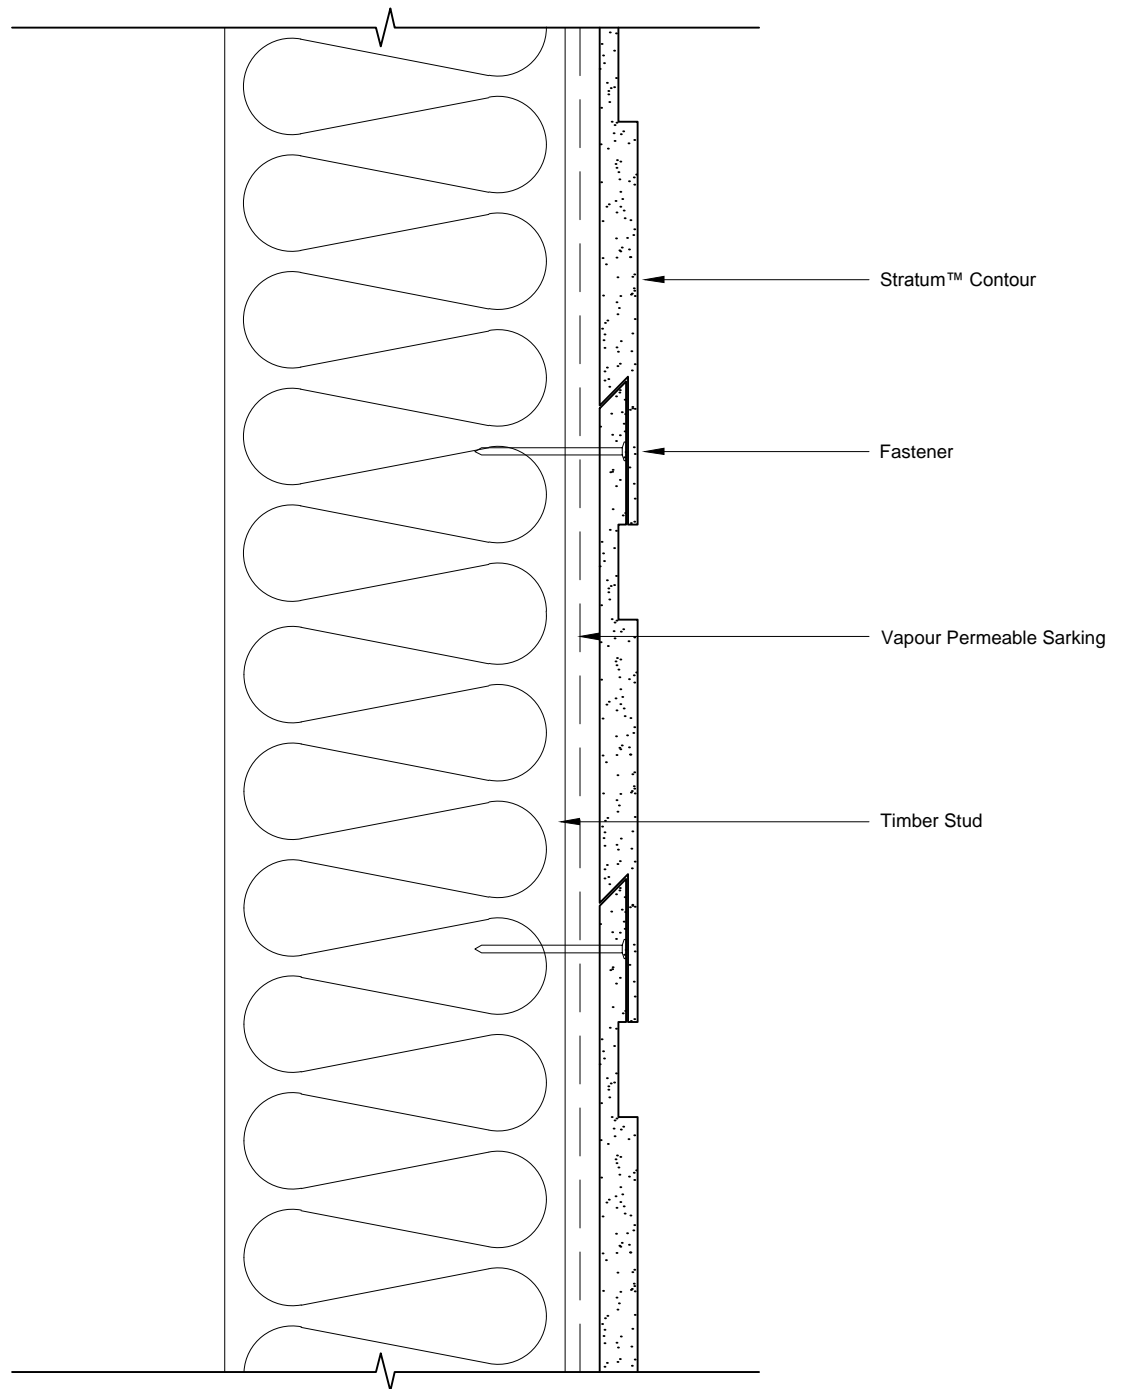

Note: Suitable for Wind Zones up to N4-C2

