

BGC Fibre Cement Product Guide



bgcinnovadesign.com.au

History & Mission

BGC Fibre Cement is a proud Australian owned manufacturer of fibre cement products.

BGC has state-of-the-art manufacturing facilities in Perth and distribution centres in all states of Australia and in New Zealand.

Our distribution network ensures that our entire product range is readily available in all states of Australia and in New Zealand.

BGC has a team of technical specialists that can assist with all specification and design information to help ensure that you always **'build it better with BGC'**.

BGC Services

- / Split packs
- / Free estimations
- / Direct to site deliveries
- / Staff training
- / Dual calls

BGC HAS INTERESTS IN

- / Residential and commercial building
- / Building and construction products
- / Contract mining
- / Civil engineering construction and maintenance
- / Quarrying
- / Road transport
- / Property ownership and management
- / Insurance

Contents

Our mission at BGC is simple – we want to ensure that people can always **‘build it better with BGC’**.

In keeping with our mission, we are constantly assessing and improving our products to ensure that we always provide cost effective, high quality and easy-to-use products to the market.

- 6 // CASE STUDY RESIDENTIAL
- 7 // CASE STUDY COMMERCIAL

INNOVA™

- 8 // DURAGRID™
- 9 // DURACOM™
- 10 // DURACOM GREYSTONE™
- 11 // DURASCAPE™
- 12-13 // DURAGROOVE™
- 14-15 // STRATUM™
- 16 // NULINE™ PLUS
- 17 // STONESHEET™
- 18 // INTERGROOVE™
- 19 // DURAFLOOR™
- 20 // DURAGRID™ ACCESSORIES
- 20 // DURACOM™ ACCESSORIES
- 20 // DURACOM GREYSTONE™ ACCESSORIES
- 21 // STRATUM™ ACCESSORIES
- 22 // DURASCAPE™ ACCESSORIES
- 22 // DURAGROOVE™ ACCESSORIES
- 22 // NULINE™ PLUS ACCESSORIES
- 23-33 // MONTAGE™

BGC FIBRE CEMENT

- 35 // DURASHEET™
- 36 // DURAPLANK™
- 37 // DURATEX™
- 38 // DURALATTICE™
- 39 // DURALINER™ PLUS
- 40 // DURALUX™ PLUS
- 41 // COMPRESSED FLOORING
- 42 // CERAMIC TILE UNDERLAY
- 43 // WARRANTY
- 43 // TERMS AND CONDITIONS

Specify Fibre Cement facade systems with confidence

bgcinnovatedesign.com.au /fire-resistant





Innova™ deemed to comply external facade systems.

- / Compressed fibre cement range
- / Architectural designed weatherboard range
- / Grooved and profiled cladding range

BGC's products have superior fire performance against four key indices.



Ignition index = 0

Fibre cement does not ignite



Spread of flame index = 0

There is no spread of fire with fibre cement



Heat evolved index = 0

Heat does not evolve from fibre cement



Smoke developed index = 0-1

Smoke is not emitted from fibre cement



Up to **BAL 40**
as per AS3959:2018



Tested in Australia by accredited Australian authorities **CSIRO** and **Exova Warrington**

Case Study 01.

Residential

Project: 119 Gabriel
Location: Cloverdale, Western Australia
Architect: Modan
Developer: Modan
Products used: Duragrid™
Duragroove™ / Durascape™

119 Gabriel is an affordable housing development comprising of 5 townhouses located in Cloverdale, Western Australia. Designed using flexible apartment principles with a high quality finish, the Innova™ range offered a designer touch with robust and functional benefits.

“The advantages of using the Innova™ system is the architectural forms we could create. We used Duragrid™ and Duragroove™ to embellish the architectural features and create some differentiation in the facade. We have been really happy with the product from Innova™ and will certainly be using them again”.

Arun Broadhurst
Director, Modan



Case Study 02. Commercial

Project: Westfield Shopping Centre
Location: Carousel, Western Australia
Architect: Scentre Group
Contractor: Denmac
Products used: Duracom™ / Duralux™

BGC supplied a variety of fibre cement products to the new extension to the Westfield Carousel Shopping Centre. Duracom™ was used by Denmac who were contracted to install the external cladding. Duralux™ was also used as soffit lining, which was installed by EXZO. BGC products allowed both Denmac and EXZO to achieve a robust finish without sacrificing design objectives.

“Duracom™ is backed by a well established company which means the product is always available when we need it, which minimised site laydown”.

Rob Innocent
Denmac




bgcinnovadesign.com.au/duragrid

The Duragrid™ facade system utilises BGC Fibre Cement sheeting, offering the ideal solution for cladding the exterior of low to medium rise homes. Duragrid™ gives buildings a modern and extremely durable finish.

Duragrid™ sheeting has a smooth, flat surface and square-edge finish that is suitable for expressed jointing and provides a facade suitable for a number of finishes; from painted to textured coatings.

- / Lightweight
- / Highly durable
- / Panels will not rot, burn or corrode
- / Panels are not affected by termites, air, steam, salt or sunlight
- / Can be easily decorated in a number of design finishes
- / Quick and simple to install using manual nailing, gun nailing or screw fixing

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm			
			1190	1790	2390	2990
9	13.5	590			✓	
		890		✓		
		1190	✓			✓

Accessories

PRODUCT	LENGTH mm	BGC CODE
Durabatten Ply H5 Treated	19 x 75 x 2700	492
Durabatten Pine H3 LOSP*	18 x 66 x 2700	493
	18 x 66 x 3000	494
Durabatten - Steel	19 x 70 x 3000	495
	35 x 70 x 3000	496
Horizontal Backing Strip	1190	839
	2390	841
	2990	843
Cavity Vent strip	2700	480
SIKA FC11 Sealant	300ml	485
	600ml	486
Countersinking Tool		855

* WA only

bgcinnovadesign.com.au/duragrid

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnoovadesign.com.au/duracom

With its smooth, flat surface and square-edge finish, Duracom™ facade system is ideal for the exterior cladding of low to medium rise buildings. Utilising BGC's trusted fibre cement coated compressed sheeting, Duracom™ delivers a strikingly modern, durable finish.

Lightweight yet exceptionally resilient, Duracom™ facade system is perfect for expressed jointing and a variety of finishes; from painted to textured coatings.

- / Weather-resistant – simply shrugs off water. Rated for weatherability by CSIRO
- / Fully-sealed, balanced panels won't rot, burn or corrode
- / Allows easy decoration in a range of design finishes
- / Rapid installation
- / Complies with BAL40 as required in AS3959:2018 – construction of buildings in bushfire-prone areas

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm			
			1800	2400	2700	3000
6	9.8	1200		✓		✓
9	14.6	900	✓	✓		✓
		1200	✓	✓	✓	✓
12	19.5	1200		✓		✓

Accessories

PRODUCT	LENGTH mm	BGC CODE
Primary Top Hat - Galvanised Steel	120 x 35 x 1.15 BMT-6000	831
	120 x 35 x 1.15 BMT-7200	833
Intermediate Top Hat - Galvanised Steel	50 x 35 x 1.15 BMT-6000	835
	50 x 35 x 1.15 BMT-7200	837
Horizontal Backing Strip	1190	839
	2390	841
	2990	842
EPDM Foam Gasket	25000	845
Weather Seal Washer		DCA-WSEAL
Wafer Head Screw	10 x 30	GSA-SCREW3010

bgcinnoovadesign.com.au/duracom

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnovadesign.com.au/duracomgreystone

Create that contemporary industrial look with Duracom Greystone™ from Innova™. With 2 shades to choose from, Natural and Charcoal, as well as 2 faces to choose from, Industrial and Velvet, you can create the perfect feature wall inside or out.

Duracom Greystone™ is a pre-finished panel that does not require painting or finishing on site. This reduces the need for painting trades and speeds up the building process. Duracom Greystone™ is ideal for use internally to create a striking feature wall or perfect for external use to create an eye catching facade.

- / Provides a modern industrial look with 2 different shades and 2 different faces
- / Lightweight and easy to install using a proven installation method
- / Great solution when panels may be difficult to maintain. The factory applied treatment means you do not need to recoat or repaint panels, reducing maintenance costs
- / Australian manufactured, tested and warranted
- / Panels are non-combustible, which ensures a perfect cladding option for both commercial and residential projects

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm	
			2400	3000
9	14.6	1200	✓	✓

Accessories

PRODUCT	LENGTH mm	BGC CODE
Primary Top Hat - Galvanised Steel	120 x 35 x 1.15 BMT-6000	831
	120 x 35 x 1.15 BMT-7200	833
Intermediate Top Hat - Galvanised Steel	50 x 35 x 1.15 BMT-6000	835
	50 x 35 x 1.15 BMT-7200	837
Horizontal Backing Strip BMT 0.42	1190	839
	2390	841
	2990	843
Duracom Greystone™ Weather Seal Washer	PKT1000	DCA-WSEAL
Wafer Head Self Drilling Screw	No. 10 x 30mm	GSA-SCREW3010
Duracom Greystone™ Edge Sealer	500ml	GSA-EDGESEAL
EPDM Foam Gasket	25000	845

bgcinnovadesign.com.au/duracomgreystone
Some sizes may not be available in all states,
please check with your local BGC office for availability.





bgcinnovadesign.com.au/durascape

Durascape™ is a 9mm-thick base sheet. Excellent for covering large areas; its 5mm wide shiplap joint gives the sheet a subtle vertical shadow line.


To create an appealingly 'rendered' look, try finishing Durascape™ onsite with a roll-on textured paint.

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm	
			2450	3000
9	13.5	900	✓	✓
		1200	✓	✓

Accessories

PRODUCT	LENGTH mm	BGC CODE
Internal Corner	3000	INTCNR12
External Corner	3000	EXTCNR12
Horizontal Flashing	3000	HORIZ9
EPDM Foam Gasket	25000	845
Snap on Corner Part B	3600	SNAPCNRB36
Snap on Corner Part C	3600	SNAPCNRC36

- / Lightweight and durable
- / Ideal for single-storey and medium-height installations where you want large panels
- / Quick installation – no need for taped and filled joints
- / Panels unaffected by termites, air, steam, salt and sunlight
- / Can be finished in a range of decorative coatings

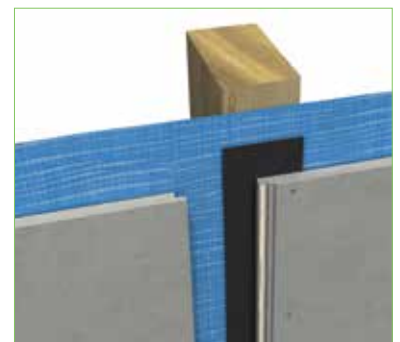

bgcinnovadesign.com.au/durascape
Some sizes may not be available in all states,
please check with your local BGC office for availability.



For up-to-the-minute exteriors or interiors, choose Duragroove™ cladding. A peerlessly adaptable, vertically-grooved panel available in different profiles and spacing, Duragroove™ has a shiplap joint to ease and speed your installation.

Specify Duragroove™ for single-storey and medium-height projects. Duragroove™ comes in five variants:

- / Smooth Narrow 100mm
- / Smooth Wide 150mm
- / Smooth Extra Wide 400mm
- / Woodgrain Wide 150mm
- / Woodgrain Extra Wide 400mm


- / Vertical grooves – excitingly contemporary alternative to traditional weatherboard
- / Lightweight and durable
- / Factory sealed panels aid paint application
- / Quick to install – no need for taped and filled joints
- / Panels resistant to termites, air, steam, salt and sunlight




Smooth Narrow
100mm



Smooth Wide
150mm



Smooth Extra Wide
400mm



Woodgrain Wide
150mm



Woodgrain Extra Wide
400mm

bgcinnovadesign.com.au/duragroove
Some sizes may not be available in all states,
please check with your local BGC office for availability.



THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	PROFILE	LENGTH mm		
				2450	2750	3000
9	13.5	1200	Smooth Narrow	✓	✓	✓
			Smooth Wide	✓	✓	✓
			Smooth Extra Wide	✓	✓	✓
			Woodgrain Wide	✓	✓	✓
			Woodgrain Extra Wide	✓	✓	✓

Accessories

PRODUCT	LENGTH mm	BGC CODE
Internal Corner	3000	INTCNR12
External Corner	3000	EXTCNR12
External Snap On Corner - Part B	3600	SNAPCNRB36
External Snap On Corner - Part C	3600	SNAPCNRC36
Horizontal Flashing	3000	HORIZ9
EPDM Foam Gasket (used to prevent moisture ingress at sheet joins)	25000	845



bgcinnovadesign.com.au/stratum

A vibrant, innovative alternative to traditional weatherboards, Stratum™ is an endlessly adaptable range of plank products.

Choose one Stratum™ profile as a standalone, or mix'n'match two or three to create eye catching and original Innova™ exterior cladding.



Stratum™



Stratum™ Woodgrain



Stratum™ Duo



Stratum™ Duo Woodgrain



Stratum™ Trio



Stratum™ Contour

- / Stratum™ is a 300mm wide plank with a 16mm horizontal joint
- / Stratum™ Woodgrain is a 300mm wide weatherboard with a 16mm horizontal joint embossed with a woodgrain pattern giving a timber like appearance
- / Stratum™ Duo is a 300mm wide weatherboard with a 16mm centre groove and the look of two slimmer weatherboards
- / Stratum™ Duo Woodgrain is a 300mm wide weatherboard with a 16mm centre groove and the look of two slimmer weatherboards embossed with a woodgrain pattern giving a timber like appearance
- / Stratum™ Trio is a 300mm wide weatherboard with 2 x 16mm horizontal grooves
- / Stratum™ Contour is a 170mm wide weatherboard with a 2mm indentation at the top of each weatherboard
- / Easy shiplap joining
- / Factory sealed, ready for painting
- / Quick, simple installation: manual nailing, gun nailing or screw fixing

bgcinnovadesign.com.au/stratum

Some sizes may not be available in all states, please check with your local BGC office for availability.



THICKNESS mm	WEIGHT kg/lm	WIDTH mm	PROFILE	LENGTH mm
				4200
12	5.2	300	Stratum™	✓
			Stratum™ Woodgrain	✓
			Stratum™ Duo	✓
			Stratum™ Duo Woodgrain	✓
			Stratum™ Trio	✓
10	2.5	170	Stratum™ Contour	✓

Accessories

PRODUCT	LENGTH mm	BGC CODE
Internal Corner - Stratum™ and Stratum™ Duo (may also be used for Stratum™ Contour)	3000 x 17	INTCNR17
External Corner - Stratum™ and Stratum™ Duo (may also be used for Stratum Contour)	3000 x 17	EXTCNR17
Internal Corner - Stratum™ Contour (recommended)	3000 x 36	INTCNR36
External Corner - Stratum™ Contour (recommended)	3000 x 36	EXTCNR36
External Snap on Corner - Part A	3600	SNAPCNR36A
External Snap on Corner - Part B	3600	SNAPCNR36B
External Snap on Corner - Part C	3600	SNAPCNR36C
Starter Strip - Stratum™ Contour	3000	680
EPDM Foam Gasket	25000	845
Sealant	Sika FC11 or similar	485

When ordering Snap on Corners, 2 parts must be ordered, Part A + Part B or Part B + Part C.



bgcinnoovadesign.com.au/nuline-plus

Nuline™ Plus is a weatherboard-style cladding. With its perfect join and a seductive look that echoes real timber, Nuline™ Plus is the natural evolution of the ever-popular Nuline™ weatherboard.

The Nuline™ Plus tongue & groove fixing will deliver seamlessly consistent joins throughout your project. With its slight bevel on the rear of the plank allowing a 25mm bearing face on the stud, you'll find fixing and nailing exceptionally easy.

- / Extend your options with 2 different profiles: square and bullnose
- / Factory sealed, ready for painting
- / Quick, simple installation: manual nailing, Gun nailing or screw fixing
- / Highly durable: no rot or decay
- / Complies with BAL40 as required in AS3959:2018 construction of buildings in bushfire-prone areas

THICKNESS mm	WEIGHT kg/lm	WIDTH mm	LENGTH mm
14	3.5	175	✓
	4.2	205	✓

Accessories

PRODUCT	LENGTH mm	BGC CODE
Internal Corner	3000	INTCNR36
External Corner	3000	EXTCNR36
J Mould	2700	805
Starter Strip	2700	825



Square



Bullnose

bgcinnoovadesign.com.au/nuline-plus
Some sizes may not be available in all states,
please check with your local BGC office for availability.



Stonesheet™ is your first call for a stone tile substrate and background for true masonry on timber or steel-framed buildings. A flat, square-edged sheet, Stonesheet™ comes as 9mm-thick panels.

Designed specially as a substrate for both residential interior and exterior applications, Stonesheet™ is an excellent alternative where other non-specifically designed substrates have been used.

- / Exterior and interior stone tile facades
- / Non-structural substrate
- / Classified type A category 3 for exterior use
- / Will take maximum stone facade weight of 40kg/m²

THICKNESS	WEIGHT	WIDTH	LENGTH mm
mm	kg/m ²	mm	3000
9	13.2	1200	✓



bgcinnovadesign.com.au/stonesheet
Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnovadesign.com.au/intergroove

Use Intergroove™ internal wall lining to create a modern floor to ceiling feature wall or half height to create a more traditional look. Intergroove™ is a strong and durable wall panel that has been specially designed for internal use.

The V shaped groove featured in Intergroove™ provides the look of traditional panelling combined with the durability and ease of maintenance of fibre cement.

- / Lightweight and durable
- / Quick to install as it eliminates the need for taped and filled joints
- / Factory sealed panels aid paint application
- / Provides a tough durable finish, ideal for areas where impact and moisture resistance is required

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm
7.5	11.2	1200	2700 ✓

bgcinnovadesign.com.au/intergroove
Some sizes may not be available in all states,
please check with your local BGC office for availability.



bgcinnoovadesign.com.au/durafloor


Your ultimate flooring solution, Durafloor™ is superb for interior wet areas such as bathrooms and laundries. You can also specify Durafloor™ for a variety of exterior uses.

Choose Durafloor™ for balconies, verandahs and sun decks. Alternatively, where premium quality is your main concern, insist on Durafloor™ as a total floor solution.


Use 19mm Durafloor™ where joist spacings are at 450mm centres. Durafloor™ 19mm has a pink tongue. Use 22mm Durafloor™ where joist spacings are at 600mm centres. Durafloor™ 22mm has a blue tongue.

- / Easy installation via traditional gun-nailing methods
- / Installation costs lower than standard compressed sheet
- / Same tongue & groove technology as traditional sheet flooring (eg: Structaflor®)
- / Greater impact resistance – feels more solid underfoot than timber-based sheet flooring products

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm		
			2250	2400	2700
19	26.2	600	✓		✓
22	31.5	600		✓	



Staggered Sheet Layout



Squared Sheet Layout




bgcinnoovadesign.com.au/durafloor

Some sizes may not be available in all states, please check with your local BGC office for availability.

DURAGRID™

Durabatten

Ply H5 Treated 19mm x 75mm x 2700mm - 492
Pine H3 LOSP* 18mm x 66mm x 2700mm - 493
Pine H3 LOSP* 18mm x 66mm x 3000mm - 494



* WA Only

Durabatten – Steel

19mm x 70mm x 3000 x 0.75 BMT - 495
35mm x 70mm x 3000 x 0.75 BMT - 496



Horizontal Backing Strip

1190mm - 839, 2390mm - 841, 2990mm - 843



Cavity Vent Strip – uPVC

19mm x 2700mm - 480



Sealant Adhesive

Sikaflex 11FC or Similar - 485



Countersinking Tool

Tungsten Carbide - 855



DURACOM™

Primary Top Hat – Galvanised Steel

120mm x 35mm x 1.15 BMT-6000 - 831
120mm x 35mm x 1.15 BMT-7200 - 833



Intermediate Top Hat– Galvanised Steel

50mm x 35mm x 1.15 BMT-6000 - 835
50mm x 35mm x 1.15 BMT-7200 - 837



Horizontal Backing Strip

1190mm - 839, 2390mm - 841, 2990mm - 843



EPDM Foam Gasket

25m - 845



Sealant Adhesive

Sikaflex 11FC or Similar - 485



Weather Seal

Facade Washer
DCA-WSEAL



Wafer Head

Self-Drilling Screw
No.10 x 30mm
GSA-SCREW 3010



DURACOM GREYSTONE™

Primary Top Hat – Galvanised Steel

120mm x 35mm x 1.15 BMT-6000 - 831
120mm x 35mm x 1.15 BMT-7200 - 833




Intermediate Top Hat– Galvanised Steel

50mm x 35mm x 1.15 BMT-6000 - 835
50mm x 35mm x 1.15 BMT-7200 - 837



Horizontal Backing Strip

1190mm - 839, 2390mm - 841, 2990mm - 843



EPDM Foam Gasket

25m - 845



Weather Seal

Facade Washer
GDCA-WSEAL



Wafer Head











Self-Drilling Screw
No.10 x 30mm
GSA-SCREW 3010



Edge Sealer








500ML
GSA-EDGESEAL



STRATUM™		
<p>Internal Corner – Stratum™ Duo and Trio 3000mm x 17mm profile - INTCNR17</p> 	<p>Internal Corner – Stratum™ Contour 3000mm x 36mm profile - INTCNR36</p> 	<p>External Corner – Stratum™ Duo and Trio 3000mm x 17mm profile - EXTCNR17</p> 
<p>External Corner – Stratum™ Contour 3000mm x 36mm profile - EXTCNR36</p> 	<p>External Snap on Corner - Part A 3600mm - SNAPCNRA36</p> 	<p>External Snap on Corner - Part B 3600mm - SNAPCNRB36</p> 
<p>External Snap on Corner - Part C 3600mm - SNAPCNRC36</p> 	<p>Starter Strip 3000mm - 680</p> 	<p>EPDM Foam Gasket 25m - 845</p> 
<p>Sealant Adhesive Sikaflex 11FC or Similar - 485</p> 		

Innova™ Accessories

DURASCAPE™ AND DURAGROOVE™

External Corner 3000mm - EXTCNR12 	Internal Corner 3000mm - INTCNR12 	Horizontal Flashing 3000mm - HORIZ9 
External Snap on Corner - Part B 3600mm - SNAPCNRB36 	External Snap on Corner - Part C 3600mm - SNAPCNRC36 	EPDM Foam Gasket 25m - 845 
Sealant Adhesive Sikaflex 11FC or Similar - 485 		

NULINE™ PLUS

Internal Corner 3000mm x 36mm profile - INTCNR36 	External Corner 3000mm - EXTCNR36 	J Mould – Aluminium 2700mm - 805 
Sealant Adhesive Sikaflex 11FC or Similar - 485 	Starter Strip – Zinalume 2700mm - 825 	



bgcinnovadesign.com.au/montage

Montage™ is a versatile fibre cement facade system that can be used both externally and internally. It's pre-formed, pre-finished and non-combustible, making it a durable, safe and aesthetic addition to your project.

With a colour palette carefully considered to be blended or contrasted, you'll have an array of options to play with. The deep form embossed into the panels also creates a striking effect, making your project stand out from the streetscape.

/ Easy to install and designed to withstand the elements, Montage™ was created with critical specifying needs in mind. Not only does it look stunning, but its simple installation speeds up the building process too – reducing project build time with no need for finishing trades.

bgcinnovadesign.com.au/montage
Some sizes may not be available in all states,
please check with your local BGC office for availability.

PANELS AND ACCESSORIES **CONCRETE**


DESCRIPTION	BGC PRODUCT CODE	SIZE mm	WEIGHT kg/m ²
Concrete - Square with Circle	KCFORMSC	3030 x 455 x 16	18.9
Concrete - Rectangular with Circle	KCFORMRC		
Concrete - Smooth Plain	KCFORMSM		



Square with Circle



Rectangle with Circle



Smooth Plain

SLIMLINE TILE

DESCRIPTION	BGC PRODUCT CODE	SIZE mm	WEIGHT kg/m ²
Slimline Tile - Limestone	K122369D	3030 x 455 x 18	17
Slimline Tile - Sandstone	K122374D		
Slimline Tile - Basalt	K122388D		
Slimline Tile - Onyx	K122582D		



Limestone



Sandstone



Basalt



Onyx

STACKSTONE

DESCRIPTION	BGC PRODUCT CODE	SIZE mm	WEIGHT kg/m ²
Stackstone - Limestone	K151358D	3030 x 455 x 18	16.7
Stackstone - Sandstone	K151303D		
Stackstone - Basalt	K151316D		
Stackstone - Onyx	K151318D		



Limestone



Sandstone



Basalt



Onyx

PANELS AND ACCESSORIES **WOODGRAIN**

DESCRIPTION	BGC PRODUCT CODE	SIZE mm	WEIGHT kg/m ²
Woodgrain - Light Teak	K112385D	3030 x 455 x 18	17.8
Woodgrain - Dark Mahogany	K112460D		
Woodgrain - Grey Oak	K112485D		
Woodgrain - Black Oak	K112525D		



Light Teak



Dark Mahogany



Grey Oak







Black Oak

MONTAGE™ PANEL COVERAGE

ROWS/COLUMNS	COVERAGE
1	455
2	910
3	1365
4	1820
5	2275
6	2730
7	3185
8	3640
9	4095
10	4550

The recommended minimum cut panel size is 100mm in length and 200mm in height. All cut panels must have edges sealed in order to protect against moisture penetration.

PANELS AND ACCESSORIES **PRE-FORMED CORNERS - HORIZONTAL INSTALLATION**

DESCRIPTION	BGC PRODUCT CODE	SIZE mm	
Concrete	KOPA048T163D	455 x 16	
Woodgrain - Light Teak	K112T385D	455 x 18	
Woodgrain - Dark Mahogany	K112T460D		
Woodgrain - Grey Oak	K112T485D		
Woodgrain - Black Oak	K112T525D		
Slimline Tile - Limestone	K122T369D	455 x 18	
Slimline Tile - Sandstone	K122T374D		
Slimline Tile - Basalt	K122T388D		
Slimline Tile - Onyx	K122T582D		
Stackstone - Limestone	K151T358D	455 x 18	
Stackstone - Sandstone	K151T303D		
Stackstone - Basalt	K151T316D		
Stackstone - Onyx	K151T318D		

PANELS AND ACCESSORIES **PRE-FORMED CORNERS - VERTICAL INSTALLATION**

Woodgrain - Light Teak	K112L385D	3030 x 18	
Woodgrain - Dark Mahogany	K112L460D		
Woodgrain - Grey Oak	K112L485D		
Woodgrain - Black Oak	K112L525D		

PANELS AND ACCESSORIES **ALUMINIUM CORNERS - EXTERNAL CORNERS**



External Corner - EXTCNR36



DESCRIPTION	BGC PRODUCT CODE	COLOUR	SIZE mm
Concrete - Square with Circle	KEXTCNR36CGO	Concrete/Grey Oak	3600
Concrete - Rectangle with Circle			
Concrete - Smooth Plain			
Slimline Tile - Limestone	KEXTCNR36LS	Limestone	3600
Slimline Tile - Sandstone	KEXTCNR36SS	Sandstone	
Slimline Tile - Basalt	KEXTCNR36BA	Basalt	
Slimline Tile - Onyx	KEXTCNR36OBO	Onyx/Black Oak	
Stackstone - Limestone	KEXTCNR36LS	Limestone	3600
Stackstone - Sandstone	KEXTCNR36SS	Sandstone	
Stackstone - Basalt	KEXTCNR36BA	Basalt	
Stackstone - Onyx	KEXTCNR36OBO	Onyx/Black Oak	
Woodgrain - Light Teak	KEXTCNR36LT	Light Teak	3600
Woodgrain - Dark Mahogany	KEXTCNR36DM	Dark Mahogany	
Woodgrain - Grey Oak	KEXTCNR36CGO	Concrete/Grey Oak	
Woodgrain - Black Oak	KEXTCNR36OBO	Onyx/Black Oak	

PANELS AND ACCESSORIES **ALUMINIUM CORNERS - INTERNAL CORNERS**




Internal Corner - INTCNR36




Basalt



Sandstone




Dark Mahogany



Onyx/Black Oak



Light Teak



Concrete/Grey Oak



Limestone

DESCRIPTION	BGC PRODUCT CODE	COLOUR	SIZE mm
Concrete - Square with Circle	KINTCNR36CGO	Concrete/Grey Oak	3600
Concrete - Rectangle with Circle			
Concrete - Smooth Plain			
Slimline Tile - Limestone	KINTCNR36LS	Limestone	3600
Slimline Tile - Sandstone	KINTCNR36SS	Sandstone	
Slimline Tile - Basalt	KINTCNR36BA	Basalt	
Slimline Tile - Onyx	KINTCNR36OBO	Onyx/Black Oak	
Stackstone - Limestone	KINTCNR36LS	Limestone	3600
Stackstone - Sandstone	KINTCNR36SS	Sandstone	
Stackstone - Basalt	KINTCNR36BA	Basalt	
Stackstone - Onyx	KINTCNR36OBO	Onyx/Black Oak	
Woodgrain - Light Teak	KINTCNR36LT	Light Teak	3600
Woodgrain - Dark Mahogany	KINTCNR36DM	Dark Mahogany	
Woodgrain - Grey Oak	KINTCNR36CGO	Concrete/Grey Oak	
Woodgrain - Black Oak	KINTCNR36OBO	Onyx/Black Oak	

PANELS AND ACCESSORIES **MONTAGE™ ACCESSORIES - HORIZONTAL**

DESCRIPTION	BGC PRODUCT CODE	
Horizontal Cavity Starter - 3030mm	KBTK-G17	
15mm Cavity Clip - 60 x 56 x 15mm	KBTK-D02	
15mm Spacer - 50 x 50 x 15mm	KBSP-002	
20mm High Hat Joiner - 3030mm	KBGK-HJ0820	
16mm Single Hat Joiner - 3030mm	KBGK-KJ0816	






PANELS AND ACCESSORIES **MONTAGE™ ACCESSORIES - VERTICAL**

DESCRIPTION	BGC PRODUCT CODE	
Vertical Cavity Starter - 150mm	KBTK-D10	
5mm Cavity Clip - 62 x 50 x 5mm	KBTK-D01-N	
5mm Spacer - 50 x 50 x 5mm	KBSP-001	
10mm High Hat Joiner - 3030mm	KBGK-HJ0810	
10mm Single Hat Joiner - 3030mm	KBGK-KJ0810	
20mm High Hat Joiner - 3030mm For joining sheets on walls higher than 3030mm	KBGK-HJ0820	
16mm Single Hat Joiner - 3030mm For joining sheets on walls higher than 3030mm	KBGK-KJ0816	
Top Hat - 15 x 75mm x 1.15TCT - 3000mm	KTOPHAT75	

PANELS AND ACCESSORIES **MONTAGE™ COMMON ACCESSORIES - HORIZONTAL AND VERTICAL**

DESCRIPTION	BGC PRODUCT CODE	
Internal Corner Flashing - 3050mm	KBGK-S15001	
65mm Ring Nail - For face fixing to timber frame	KBRNKH001	
Primer for Cut Edges and Joints - 100g	KPRIMER	
35mm SS Screws - Clips to Timber Frame	KBSBD001	
19mm SS Screws - Clips to Steel Frame	KBSBJ001	

PANELS AND ACCESSORIES **EAVES ACCESSORIES**

DESCRIPTION	BGC PRODUCT CODE	
Eaves Trim Channel - Grey - 2730mm	KFVK-N24F-L27-AG	
Eaves Trim Channel - Brown - 2730mm	KFVK-N24F-L27-CB	
Eaves Trim Channel - Black - 2730mm	KFVK-N24F-L27-BK	
External Corner - Grey - 86 x 32.5 x 51.3mm	KFVK-N24FSD-AG	
External Corner - Brown - 86 x 32.5 x 51.3mm	KFVK-N24FSD-CB	
External Corner - Black - 86 x 32.5 x 51.3mm	KFVK-N24FSD-BK	
Internal Corner - Grey - 86 x 67.4 x 32.5mm	KFVK-N24FSI-AG	
Internal Corner - Brown - 86 x 67.4 x 32.5mm	KFVK-N24FSI-CB	
Internal Corner - Black - 86 x 67.4 x 32.5mm	KFVK-N24FSI-BK	
Trim Joint - Grey - 40 x 32.5mm	KFVK-N24FJC-AG	
Trim Joint - Brown - 40 x 32.5mm	KFVK-N24FJC-CB	
Trim Joint - Black - 40 x 32.5mm	KFVK-N24FJC-BK	
End Cap - Grey - 32.5 x 25mm	KFVK-N24FEC-AG	
End Cap - Brown - 32.5 x 25mm	KFVK-N24FEC-CB	
End Cap - Black - 32.5 x 25mm	KFVK-N24FEC-BK	

PANELS AND ACCESSORIES MONTAGE™ SEALANTS


MONTAGE™ PANEL	BGC PRODUCT CODE	COLOUR	SIKA PRODUCT
Concrete - Square with Circle	1951	Concrete Grey	Sikaflex Pro 600
Concrete - Rectangle with Circle			
Concrete - Smooth Plain			
Slimline Tile - Limestone	1957	Off White	Sikaflex Pro 600
Slimline Tile - Sandstone	1955	Sandstone	
Slimline Tile - Basalt	1956	Dark Grey	
Slimline Tile - Onyx	1952	Black	
Stackstone - Limestone	1957	Off White	Sikaflex Pro 600
Stackstone - Sandstone	1953	Redwood	
Stackstone - Basalt	1951	Concrete Grey	
Stackstone - Onyx	1956	Dark Grey	
Woodgrain - Light Teak	1953	Redwood	Sikaflex Pro 600
Woodgrain - Dark Mahogany	1954	Dark Amber	
Woodgrain - Grey Oak	1951	Concrete Grey	
Woodgrain - Black Oak	1952	Black	




Concrete Grey



Dark Grey



Black




Dark Amber



Redwood



Sandstone



Off White

PANELS AND ACCESSORIES **MONTAGE™ TOUCH UP PAINT**

DESCRIPTION	BGC PRODUCT CODE
Concrete - 80ml	KTUPCON
Woodgrain - Light Teak - 80ml	KTUPWGLT
Woodgrain - Dark Mahogany - 80ml	KTUPWGDM
Woodgrain - Grey Oak - 80ml	KTUPWGGO
Woodgrain - Black Oak - 80ml	KTUPWGBO
Slimline Tile - Limestone - 80ml	KTUPSTLS
Slimline Tile - Sandstone - 80ml	KTUPSTST
Slimline Tile - Basalt - 80ml	KTUPSTB
Slimline Tile - Onyx - 80ml	KTUPSTO
Stackstone - Sandstone - 80ml	KTUPQSS
Stackstone - Limestone - 80ml	KTUPQLS
Stackstone - Basalt - 80ml	KTUPQB
Stackstone - Onyx - 80ml	KTUPQO



The BGC Innova™ Design website is home to all your technical data and installation needs.



Full range of facade linings and flooring



Case studies and testimonials



Download CAD, Revit, BIM, and 3D Jpeg

Go to our website for more information on the Innova™ range.
bgcinnovadesign.com.au

Contact us to find out more
Telephone 1300 652 242



bgcinnoovadesign.com.au/durasheet

Durasheet™ provides first-rate external cladding for gable ends, eaves, soffits, carports and verandah linings. It's a general-purpose sheet you can use on both timber and steel-framed buildings.

Durasheet™ comes in two thicknesses to suit both residential and light commercial fibre cement applications, significantly extending your professional specifying choice.

- / 4.5mm thickness: used mainly in timber-framed residential buildings for soffit/eaves linings and cladding features such as gable ends
- / 6mm thickness: recommended for residential and light commercial applications, cyclonic wind zones and steel-framed constructions
- / Classified as Type A Category 2 for exterior use

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm			
			1800	2400	2700	3000
4.5	6.6	450		✓		
		600		✓		
		750		✓		
		900		✓		✓
		1200	✓	✓	✓	✓
6	8.8	900		✓		✓
		1200	✓	✓	✓	✓



4.5mm & 6mm Square Edge

bgcinnoovadesign.com.au/durasheet

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnoovadesign.com.au/duraplank

In its appealing look and easy installation, the design of Duraplank™ evokes traditional weatherboards. Duraplank™ won't decay, rot or become damaged by white ants, and it's non-combustible.

Beautifully attractive – you have the option of a smooth finish, a woodgrain or a rustic texture for an authentic weatherboard look – Duraplank™ also has the strength to withstand the rigours of family life.

- / Similar flavour to traditional weatherboards
- / No decay, rot or white ant damage
- / Safe and durable – needs only minimum maintenance
- / Variety of finishes
- / Complies with BAL29 as required in AS3959:2018 – Construction of buildings in bushfire-prone areas

THICKNESS mm	WEIGHT kg l/m	WIDTH mm	PROFILE	LENGTH mm
7.5	2.5	230	Smooth & Woodgrain	4200
	3.3	300	Smooth & Woodgrain	

Accessories

PRODUCT	LENGTH mm	BGC CODE
Joiner Smooth	230	565
	300	566
Joiner Woodgrain	230	567
	300	568
Internal Corner	3000	INTCNR17
External Corner	3000	EXTCNR17
Internal Corner	3000	INTCNR36
External Corner	3000	EXTCNR36
Snap on Corner Part - A	3600	SNAPCNR36
Snap on Corner Part - B	3600	SNAPCNR36

bgcinnoovadesign.com.au/duraplank

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnoovadesign.com.au/duratex

A tough, durable, waterproof external cladding system, Duratex™ provides a solid substrate for applied decorative finishes when combined with proprietary jointing and coating systems.

Tough, durable, waterproof and fire-resistant, Duratex™ is great for lightweight construction and features a factory-applied blue tint to help with identification.

- / Specify for residential and commercial applications
- / Accepts a wide range of textured coatings
- / Complies with AS3959:2018 – Construction of buildings in bushfire-prone areas (7.5mm: BAL29; 9mm: BAL40)

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm			
			2400	2440	2725	3000
7.5	10.9	1200		✓	✓	✓
9	13	1200	✓			✓



7.5mm & 9mm Recessed Edge

bgcinnoovadesign.com.au/duratex

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnovadesign.com.au/duralattice

Duralattice™ is a cellulose fibre reinforced cement sheet. Duralattice™ marries the instant decorative appeal of traditional lattice to the practical durability of fibre cement.

With its easy handling and installation, you'll find Duralattice™ great for use in and around the house and garden. (To comply with codes and regulations when working with balustrades, always ask a structural engineer for design specs.)

- / Especially good for gazebos, pergolas, privacy screens, verandah enclosures, fencing, gable infills and trellises
- / Use also for poolside and other shade-providing structures
- / Made as single unit without joints
- / Feature panels and many more fashionable and practical applications

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm
6	7		2400
		900	✓
		1200	✓



bgcinnovadesign.com.au/duralattice

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnoovadesign.com.au/duraliner-plus

DuralinerTM Plus is a general-purpose fibre cement building board. Designed for flush jointing, DuralinerTM Plus is highly effective for use in wet areas, interior linings, ceilings, as a substrate for ceramic wall tiles and for fire and acoustically-rated interior walls.

You can also specify DuralinerTM Plus for soffits and other external applications where there'll be no direct impact from the weather.

- / Wide range of applications
- / Specify as part of fire and acoustic-rated wall systems
- / Rebated on 3 edges for easy jointing and installation

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm					
			1800	2400	2700	3000	3600	4200
6	8.9	900		✓				
		1200	✓	✓	✓	✓	✓	✓
		1350		✓		✓	✓	✓
9	13.2	1200		✓	✓	✓	✓	
		1350				✓	✓	
12	17.9	1200				✓		



6mm, 9mm & 12mm Recessed Edge

bgcinnoovadesign.com.au/duraliner-plus

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnovadesign.com.au/duralux-plus

DuraluxTM Plus is a general-purpose fibre cement building board that you can use for many different and demanding applications. Among these are interior lining, domestic and commercial soffits, exposed beam ceilings, in wet areas and as a substrate for ceramic wall tiles.

Quick and easy to apply to timber or steel, its three available thicknesses make DuraluxTM Plus a flawless choice for many domestic and commercial applications.

- / Easy, correct installation and maintenance will ensure full water-resistance
- / Simply decorated in a variety of finishes
- / Classified as Type B Category 2 product for use in applications sheltered from direct weathering

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm			
			2400	2700	3000	3600
6	8.9	1200	✓	✓	✓	✓
9	13.2	1200	✓	✓	✓	



6mm & 9mm Square Edge

bgcinnovadesign.com.au/duralux-plus



bgcinnovadesign.com.au/compressed

High-density Compressed fibre cement sheeting is a superlative substrate for interior floors in framed-construction wet areas. Ideal for upper storeys and transportable buildings, it's equally suited for use as a substrate for exterior decks.

Compressed fibre cement sheeting is manufactured from cement, finely-ground silica, cellulose fibres and water. After forming, we compress the sheeting to high density, then cure it in a high-pressure steam autoclave for an exceptionally durable, fit-for-purpose product.

- / Immune to permanent water damage
- / Impact-resistant and immune to termite attacks
- / Highly durable and dimensionally stable
- / Suitable for wet areas and for cladding external decking
- / Non-combustible and easy to work

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm			
			1800	2400	2700	3000
15	26	1200	✓	✓	✓	✓
18	31.1	900		✓		✓
		1200	✓	✓		✓
24	41.2	1200		✓		

bgcinnovadesign.com.au/compressed

Some sizes may not be available in all states, please check with your local BGC office for availability.



bgcinnovadesign.com.au/ctu

Ceramic Tile Floor Underlay is a specially-formulated fibre cement sheet. It's designed as a stable substrate for slate and ceramic floor tiles, so you can install ceramic tile floor underlay over new or existing timber floorboards, plywood or particleboard flooring.

In dry areas, apply tiles directly to Ceramic Tile Floor Underlay for an impervious, easily-cleaned surface. In wet areas and anywhere subject to accidental flooding or watersplash, install a waterproof membrane between the underlay and your tiling.

- / Specially-manufactured fibre cement sheet
- / Excellent substrate for floor tiles, both slate and ceramic
- / For dry and wet areas (see above)
- / Can be applied to both new and existing timber floorboards, plywood or particleboard

THICKNESS mm	WEIGHT kg/m ²	WIDTH mm	LENGTH mm
6	8.8	900	1800
			✓



bgcinnovadesign.com.au/ctu

Some sizes may not be available in all states, please check with your local BGC office for availability.

Warranty

We warrant that our products are free from defects caused by faulty manufacture or materials for a period of 15 years from the date of purchase. If you acquire any defective products, we will repair or replace them, supply equivalent replacement products or refund the purchase price within 30 days of receiving a valid claim subject to product inspection and confirmation of the existence of a defect by BGC. We will bear the cost of any such repair, replacement or refund.

THIS WARRANTY IS GIVEN BY:

BGC FIBRE CEMENT PTY LTD
121 Bannister Rd Canning Vale WA 6155
Phone 08 9334 4900 Fax 08 9334 4749

To claim under this warranty, you must provide proof of purchase as a consumer and make a written claim (including any costs of claiming) to us at the address specified within 30 days after the defect was reasonably apparent, or if the defect was reasonably apparent prior to installation, the claim must be made prior to installation. You may not claim under this warranty for loss or damage caused by:

- / Faulty or incorrect installation by non-BGC installers (BGC's installation procedures are at www.bgcinnovadesign.com.au).
- / Failure to comply with the National Construction Code (NCC) or any applicable legislation, regulations approvals and standards.
- / Products not made or supplied by BGC.
- / Abnormal use of the product.
- / Normal wear and tear.

The benefits available under this warranty are in addition to other rights and remedies of the consumer under the law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

Terms and Conditions

BGC Fibre Cement's Terms and Conditions of Sale ("Agreement"), as in place and published at the date of this brochure, which are available upon request or on our website at www.bgcinnovadesign.com.au. The purchaser's terms and conditions, howsoever provided, do not form part of the Agreement.

To contact
your nearest
BGC stockist,
Please call:

ADELAIDE

71 FROST ROAD
SALISBURY SOUTH
SOUTH AUSTRALIA 5106
TELEPHONE 08 8480 1700
FACSIMILE 08 8258 2612

BRISBANE

53 ARGON STREET
CAROLE PARK
QUEENSLAND 4300
TELEPHONE 07 3548 8400
FACSIMILE 07 3271 1733

MELBOURNE

200 MAIDSTONE STREET
ALTONA VICTORIA 3018
TELEPHONE 03 9392 9444
FACSIMILE 03 9392 9404

PERTH

121 BANNISTER ROAD
CANNING VALE
WESTERN AUSTRALIA 6155
TELEPHONE 08 9492 1700
FACSIMILE 08 9334 4749

SYDNEY

BUILDING 2A
37 STENNETT ROAD
INGLEBURN
NEW SOUTH WALES 2565
TELEPHONE 02 8107 9500

TECHNICAL HELP LINE

1300 652 242

BGCINNOVADESIGN.COM.AU



Quality
ISO 9001
www.bgc.com.au